



- ▶ Event & Exhibition
- ▶ Tent Rental Companies

Dimensions	5 x 5 m	6 x 6 m						
Side height	2,80 m							
Surface	25 m ²	36 m ²						




Available in 5 m x 5 m and 6 m x 6 m, the Milano is the tent with just that little bit more. The Milano is the ultimate tent for any event with its elegant design and many options.

In addition you can finish the hall as you choose amongst others with **doors**, **glass windows**, **gothic windows**, **PVC panels**, **decoration**, **flooring**, **guttering**.


Accessories



Cross section drawing

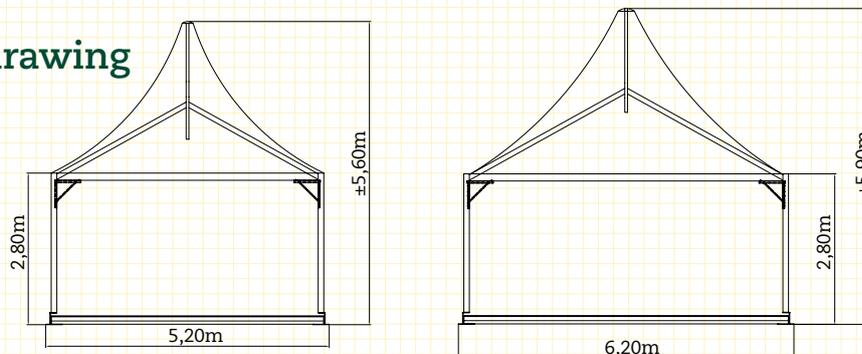

Ground plan

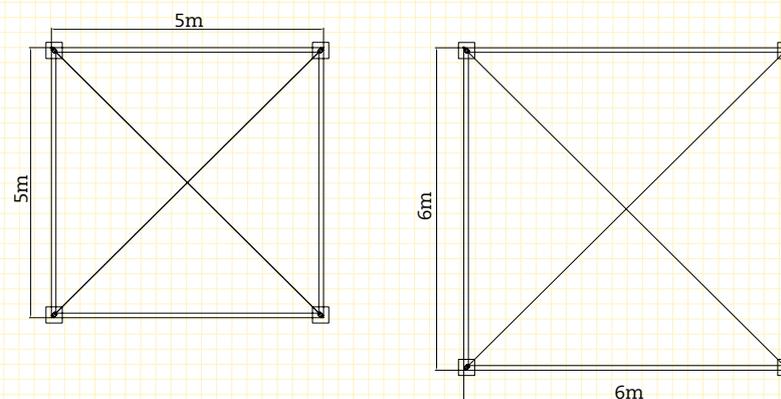

Construction

It is a self-supporting anodised aluminium construction with a floating pole that rests on galvanised steel base-plates and ground beams. The standard anchoring is realised with stakes. All parts are connected with pins for quick and easy installation. The stability is ensured using wind bracing. The construction is available with a floating or centre pole. The structure is subject to the most important international building standards (e.g. the British “Building Codes”, the Germany Prüfbuch” standard, the French “Extrait du registre de sécurité”, etc.).

Technical specifications

Standard width	5 m	6 m
Side height	2,87 m	
Ridge height	5,6 m	5,9 m

Roof fabric

The roof fabric is made from PVC coated polyester fabric (white translucent, white non-translucent or colour). The roof fabric is stretched using ratchets. Flame retardant according to the French standard M2, German standard DIN 4102 B1 and British Standard BS 5438. The fabric is UV-stabilised and treated against deterioration due to rot and mildew.

Sidewalls

The sidewall fabrics are made from PVC coated polyester fabric (white translucent, white non-translucent or colour). Flame retardant according to the French standard M2, German standard DIN 4102 B1 and British Standard BS 5438. The fabric is UV-stabilised and treated against deterioration due to rot and mildew. One sidewall of 4 m or 5 m is made from two sections, of 2 m or 2.5 m, which are connected with a zip. The sidewall slides into the leg with a keder in the keder tracks. The sidewall is attached to the ground beam at the bottom with straps and at the top the sidewall is slid into the side purlin with keder sections. This prevents the fabric from flapping in strong winds.



Veldeman Structure Solutions ▶ Industrieterrein Vostert 1220 ▶ 3960 Bree (Belgium)

Tel.: +32 (0)89 47 31 31 ▶ Fax: +32 (0)89 47 37 77 ▶ E-mail: info@veldemangroup.be ▶ Website: www.veldemangroup.be